

双喷扩香机说明书三合一（英文繁体日文） 20200926


风琴折

尺寸：116*80mm

单色印刷

Dual Nozzle Aroma Diffuser


User Manual

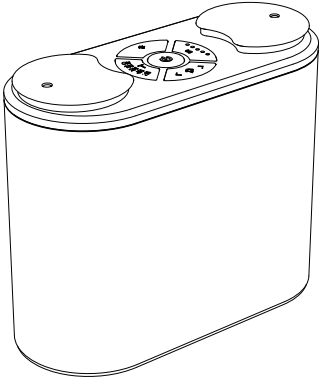

(Applicable Model: DN01/DN02/DN03)

Product Introduction

As an essential oil sprayer and aroma diffuser with elegant dual nozzle design, this aroma diffuser can perfectly atomize and spray pure plant essential oil to release pleasant fragrance by means of dual-fluid spray technology, so that you can enjoy a comfortable aromatherapy experience in warm-color ambient lights. Users can easily control the diffuser through WeChat applet (only applicable for Model DN02) or APP (only applicable for Model DN03) to enjoy the elegant and high-quality life.

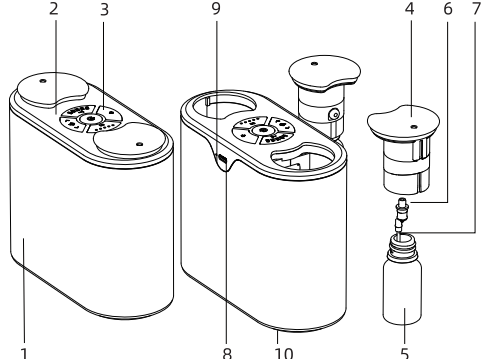


Product Components:

1. Aluminum Alloy Casing	5. Essential Oil Bottle	9. Charging Indicator
2. Panel	6. Atomization Core	10. Ambient Light
3. Panel Buttons	7. Essential Oil Pipe	11. Type-C Charging Cable
4. Spray Cover	8. Type-C Charging Port (see accessory)	

Accessory: User Manual 1, Atomization Core 2, Essential Oil Pipe 2, Type-C Charging Cable 1

Instructions:

Fill in Essence Oil:

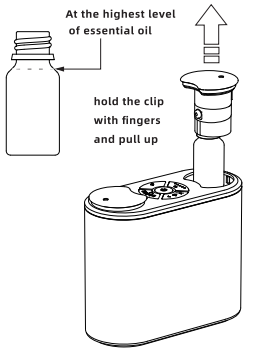

Operations of Panel Buttons:

1. Power Button: : Press the button to power on, press again to power off.

2. "T" Operating Time Button:

ON: Always Operating
1H: Operating for 1 hour,
2H: Operating for 2 hours,
4H: Operating for 4 hours,
8H: Operating for 8 hours

3."S" Spray Intensity Button: press to light up the indicator ● in different gears; when all lights are on, press again to return to gear 1:

- : Gear 1, spray for 5 seconds and halt for 180 seconds
- : Gear 2, spray for 10 seconds and halt for 120 seconds
- : Gear 3, spray for 30 seconds and halt for 90 seconds
- : Gear 4, spray for 60 seconds and halt for 60 seconds
- : Gear 5, spray for 60 seconds and halt for 30 seconds

4. L/R Spray Button: As default setting, left indicator is on to start the left spray, press the button once and right indicator is on to start the right spray.

5. Ambient Light Button: As default setting, the indicator is OFF. Press the button once to enter "Night Haze" mode; press the button again to enter "Warm Light Diffusion" mode; press the button for the third time to shut off ambient light. Press again to repeat the operations above.

Charging Operation: :

1. Plug Type-C charging cable into the Type-C charging port.

2. Connect USB charging cable to common power adapter. (Note: Only applicable to power adapters DC 5V/1A or DC 5V/2A with national standards)


3. Charging Indicator Status (When Power On):

A. When charging cable is not plugged and battery level is less than 5%, the charging indicator will turn red and keep flashing.

B. Charging indicator will turn red and keep flashing

C. When battery is fully charged, charging indicator will turn blue.

Replacement of Built-in Atomization Core



(Essential oil is slightly corrosive. Be careful not to spill. Please wash hands immediately in case of accidental contact.)

Product Specifications:

Product Name	Dual Nozzle Aroma Diffuser		
Model	DN01	DN02	DN03
Applicable Charging Adapters	DC 5V, 1A / DC 5V, 2A		
Product Size	144mm*64mm*123mm (L*W*H)		
NET Weight	About 670g		
Battery Capacity	4000mAh		
Maximum Battery Duration	About 60 Days		

Note: All the data above are only based on laboratory test and there may be slightly different due to test conditions and environments.

Safety Instructions

Danger

- Essential oil is corrosive, do not directly contact with skin or splash into eyes, mouth and nose.
- Do not use incompatible power adapters for battery charging.

Notes:

- Do not disassemble or remove any parts during the product operation
- Use at room temperature of 10°C- 50°C.
- It's recommended to use pure plant essential oil or volatile and non-sticky essential oil.
- It's normal that spray may be invisible due to the light or environmental factors.


Warranty

This product has been strictly tested before leaving factory. Within one year since the date of purchase, the customer can apply for free repair or replacement due to the malfunctions resulting from normal use (the customer may need to pay relevant shipment). Please contact the product seller for warranty service within the valid period if necessary. The malfunctions resulting from accidents, improper use or maintenance shall not be covered by the warranty.



雙噴擴香儀


產品說明書

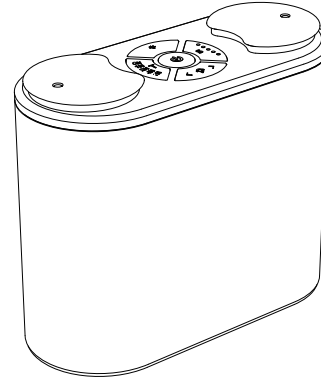

適用型號：DN01 / DN02 / DN03

產品介紹

這是一款精心設計的雙噴頭選擇精油噴霧擴香儀。它運用二流體噴霧技術將純植物精油霧化噴出釋放香味，配合暖色調的氛圍燈讓您盡享芬芳舒適的物業體驗。使用者可使用手機微信小程序（只適用機型DN02）或APP（只適用機型DN03）來簡易操控產品，讓您愜意享受高品質高品味生活。

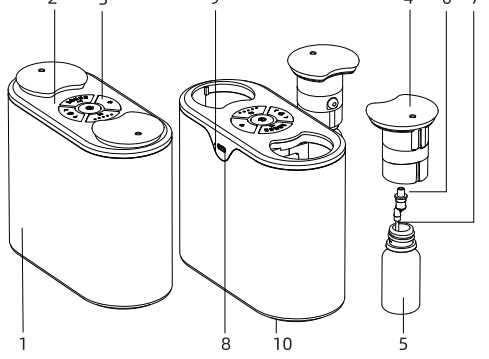


產品部件：

1. 擴香儀合金外殼	5. 精油瓶	9. 充電指示燈
2. 面板	6. 霧化芯	10. 氛圍燈
3. 面板按鍵	7. 精油吸管	11. Type-C 充電線
4. 噴霧蓋子	8. 充電Type-C口（見附件）	

配件：說明書1份，霧化芯2個，精油吸管2根，Type-C充電線1根

使用說明

裝入精油：

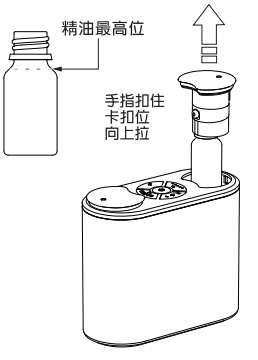

面板按鍵操作：

1. 開關機按鍵：按一次開機，再按一次關機。

2. "T" 工作時間按鍵：

ON：一直工作
1H：工作1個小時
2H：工作2個小時
4H：工作4個小時
8H：工作8個小時

3. "S" 噴霧強度按鍵，按下逐次點亮圓點燈●，全亮後再按1次回到1檔：

- ：1檔，噴霧5s，停止180s
- ：2檔，噴霧10s，停止120s
- ：3檔，噴霧30s，停止90s
- ：4檔，噴霧60s，停止60s
- ：5檔，噴霧60s，停止30s

正面

4.左右噴霧按鍵：默認左邊燈亮左邊噴霧，按1次右邊燈亮右邊噴霧。

5.氛圍燈按鍵：默認關閉，按1次氛圍燈亮“夜幽藍”模式，再按1次氛圍燈亮“漫射暖光”模式；再按1次氛圍燈關閉；再按一下循環以上。。

充電操作：

1.將Type-C充電線微型Type-C磁插入擴香儀Type-C口。

2.Type-C充電線USB端插入日常所用電源適配器的USB口。（注意：只適用於輸出為DC 5V / 1A或DC 5V / 2A符合國家規格的電源適配器）


3.充電指示燈狀態（開機時）：

A.未插充電線時，電池電量低於5%，充電指示燈亮紅色並閃爍。

B.充電時指示燈亮紅色並閃爍。

C.充電充滿時指示燈亮藍色。

內置霧化芯更換操作



1.抽出噴霧蓋子，擲下精油瓶。

2.用適當力度拔出霧化芯和精油瓶。

3.將精油瓶插入新霧化芯，然後將霧化芯及吸管插入噴霧蓋子內插孔處。

4.將精油瓶擲進噴霧蓋子，將噴霧蓋子和精油瓶一起對準位置裝入擴香儀對準位置。

(精油對皮膚有輕微腐蝕性，注意切勿倒灌精油，如沾在手上請立刻洗淨)

產品規格書

品名	雙噴擴香儀		
型號	DN01	DN02	DN03
適用充電適配器規格	輸出DC 5V, 1A / DC 5V, 2A		
產品尺寸	144mm*64mm*123mm (長*寬*高)		
淨重	約670克		
電池容量	4000mAh		
連續工作最大續航	約250小時		
日常工作最大續航	約60天		

說明：以上資料為實驗室測試數值，因使用條件及環境不同，資料會有細微差距。

安全使用說明

危險

- 精油有腐蝕性，請不要將精油倒灌在皮膚上，不要吸入鼻、口、鼻。
- 不要使用不合規格的電源適配器對產品進行充電。

注意

- 切勿在產品工作時拆卸或移除任何部件。
- 請在室溫10°C- 50°C的環境下使用。
- 推介使用純植物精油，或者易揮發不黏稠的精油。
- 產品工作有時由於光線、環境原因，觀察不到噴霧量是屬於正常現象。


保修說明

本產品出廠前經過嚴格測試以保證品質。顧客自購買之日起計1年內，如正常使用而機器發生故障，可獲得免費維修或更換（顧客可能會被要求支付相關的運輸費用）。如有需要請在保修期內聯絡售賣此產品的商家提供優質服務。而由於意外事件以及使用不當或維護保養不當而造成的品質問題，不在保修範圍內。



ダブルスプレーアロマセラピーマシン


取扱説明書

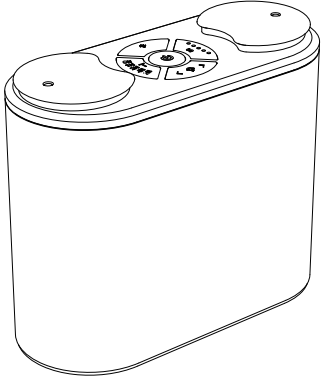

(適用型番：DN01 / DN02 / DN03)

製品紹介

本製品は心を込めて作ったダブルスプレー選択可能アロマセラピーマシンです。本製品は二流体噴霧技術を利用して、フラスコエッセンスオイルを霧化して、香りを出します。また、ウォームカラーの雰囲気ランプと組み合わせることで、香ばしくて気持ち良いアロマセラピー体験を楽しむことができます。ユーザーはスマホWechatの「ミニプログラム（型番DN02のみに適用）」またはアプリ（型番DN03のみに適用）により本製品を簡単に操作することができます。高品質でハイセンスな生活を心地よく楽しむことができます。

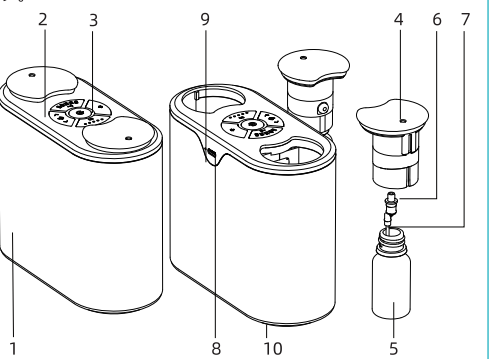

製品パーツ：

1. アルミ合金本体	5. アロマオイルボトル	9. 充電指示ランプ
2. パネル	6. 霧化コア	10. 雰囲気ランプ
3. パネルボタン	7. アロマオイルストロー	11. Type-Cケーブル
4. スプレーカバー	8. 充電Type-Cポート（添付に参照）	

パーツ：取扱説明書*1、霧化コア*2、アロマオイルストロー*2、Type-C充電ケーブル*1

使い方

アロマオイル入れ：



1.指でスプレーカバーのところのボタンを押して引っ張り、アロマオイルボトルを取り出します。

2.アロマオイルをアロマオイルボトルに入れます。二種類のアロマオイルを選択して、別々で左右の二つのボトルに入れることができます。（ご注意：アロマオイルの量はボトルのネジ山の下下のところを超えてはいけません。）。

3.スプレーカバーをアロマオイルボトルにつけて、またアロマオイルボトルをアロマセラピー本体に入れます。

パネルボタンの各種操作

1.ON/OFFボタン：一回押すことでONになり、もう一回押しますと、OFFになります。

2. "T" 動作時間ボタン：一回押すことでONになり、もう一回押しますと、OFFになります。

ON: 常時に運行
1H: 運行1時間
2H: 運行2時間
4H: 運行4時間
8H: 運行8時間

3. "S" 噴霧強度ボタン：押すことで●ランプが順次に点灯します。全部点灯した後に、もう一回押しますと、段階1に戻ります。

- ：段階1 噴霧5s 停止180s
- ：段階2 噴霧10s 停止120s
- ：段階3 噴霧30s 停止90s
- ：段階4 噴霧60s 停止60s
- ：段階5 噴霧60s 停止30s

4.左右噴霧ボタン：デフォルト設定として、左のランプが点灯し、左の方が噴霧します。一回押しますと、右のランプが点灯し、右の方が噴霧します。

5.雰囲気ランプボタン：デフォルト設定としてはOFFです。一回押しますと、（夜間照明）モードになり、もう一回押しますと、（ウォームライト）拡散モードになり、また、もう一回押しますと、雰囲気ランプがOFFになります。もしまた引き続き押しますと、上記の順番で繰り返します。

充電操作：

1.Type-C充電ケーブルをアロマセラピーマシンのType-Cポートに差し込みます。

2.Type-CケーブルのUSB側を日常用の電源アダプタに差し込みます（ご注意：出力DC 5V/1AまたはDC 5V/2A国家規格に満足する電源アダプタのみに適用）

3.充電指示ランプの状態（電源ON状態）：

A.充電ケーブルを差し込まない場合、バッテリー残量は5%以下になりますと、指示ランプは赤ランプで点滅します。

B.充電の場合、指示ランプが赤ランプで点滅します。

C.充電完了の場合、指示ランプが青ランプで常時に点灯します。

内蔵する霧化コアの交換



1.スプレーカバーを取り出して、アロマオイルボトルを取り外します。

2.適当な力を入れて、霧化コアとアロマオイルストローを抜き出します。

3.アロマオイルストローを新しい霧化コアに差し込みます。また、霧化コアとストローをスプレーカバーにつけます。

4.アロマオイルボトルをスプレーカバーに組み込みます。また、スプレーカバーとアロマオイルボトルと一緒にアロマセラピーマシンに取り付けます。（アロマオイルはお肌に微腐食性がありますので、アロマオイルを零さないようにご注意ください。手についた場合、すぐに洗ってください）

製品規格

品名	ダブルスプレーアロマセラピーマシン		
型番	DN01	DN02	DN03
適用電源アダプタ規格	出力DC 5V, 1A/DC 5V, 2A		
製品サイズ	144*64*123mm (長さ*幅*高さ)		
純重	約670g		
バッテリー容量	4000mAh		
最大連続動作時間	約250時間		
日常運行最大スタンバイ時間	約60日		

ご注意：上記データはあくまでも実験室で測定した数値です。使用条件及び使用環境により、数値は少し差がある可能性があります。

ご安全に利用いただけますように

危険

- アロマオイルは腐食性がありますので、皮膚に零さないようにしてください。また、目や口や鼻に入らないようにしてください。
- 規格に満足しない電源アダプタを使用して本製品に充電しないでください。

注意

- 本製品が運行している時に、部品を取り出したりばらしたりしないでください。
- 室温10℃～50℃の環境でご使用ください。
- フラスコエッセンスオイルの使用をお勧めします。また、アロマセラピーマシンに取り付けられないアロマオイルを選択しないでください。
- 光や環境の原因でミストを見えない可能性があります。これは正常現象です。

保証について

本製品は出荷する前の厳しいテストにより品質を保証します。購入日から一年間以内に、本製品を正しく使用する前提で製品が壊れた場合、無料で修理や交換することができます（お客様が関連物流費用を負担する可能性があります）。必要な場合、保証期間中に販売業者に連絡し、品質保証サービスを依頼してください。正しく使用・メンテナンスしなかったことや事故などの原因で発生した品質問題については、保証対象外となります。



反面